


COMPONENT	MATERIAL	HEAT TREAT	FINISH	FINISH SPEC.
SCREW	300 SERIES STAINLESS	N/A	PASSIVATED AND/OR TESTED	ASTM A380
RETAINER	300 SERIES STAINLESS	N/A	PASSIVATED AND/OR TESTED	ASTM A380
SPRING	300 SERIES STAINLESS	N/A	N/A	N/A
WASHER	GLASS FILLED NYLON, BLUE	N/A	N/A	N/A

PERFORMANCE WHEN PROPERLY INSTALLED INTO .060 MIN. THICK COLD-ROLLED STEEL.

INSTALLATION: 3500 LBS. AVG.
RETAINER PUSH-OUT: 350 LBS. AVG.

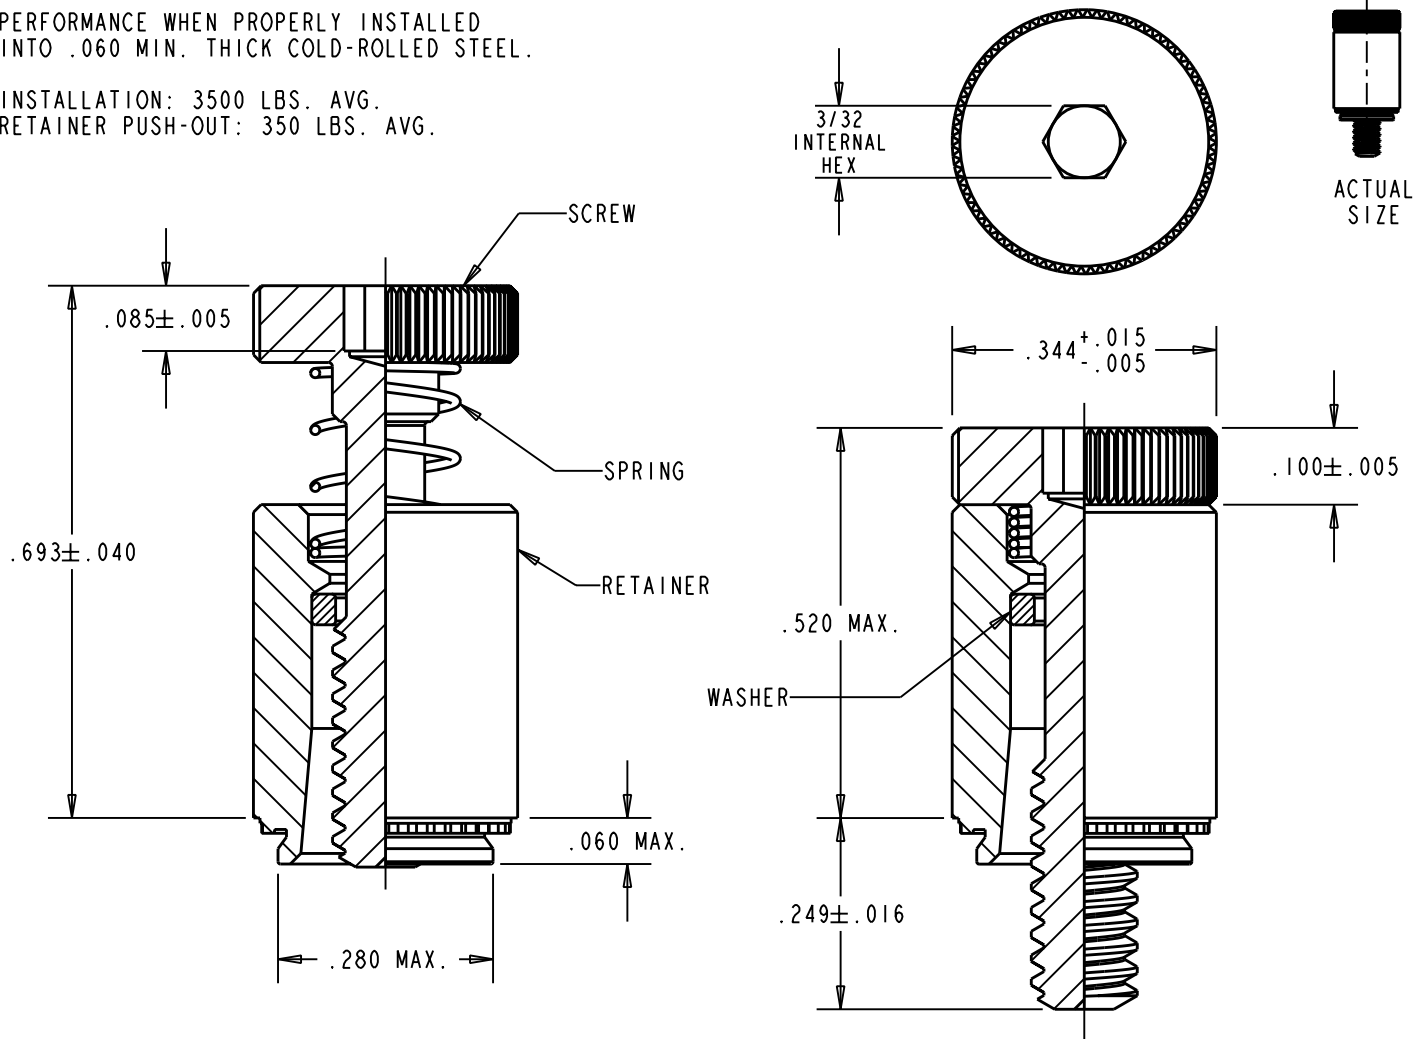

SEE PEM TECHNICAL SUPPORT SECTION OF OUR WEBSITE (WWW.PEMNET.COM) FOR RELATED STANDARDS AND SPECIFICATIONS.

© 2015 PennEngineering

ALL DIMENSIONS IN INCHES.

NOTICE: CONFIDENTIAL PROPRIETARY INFORMATION. THIS PRINT CONTAINS IDEAS, INFORMATION, AND INTELLECTUAL PROPERTY WHICH ARE THE EXCLUSIVE PROPERTY OF PENNENGINEERING®. RECIPIENT MUST KEEP THE INFORMATION DISCLOSED HEREIN CONFIDENTIAL AND RECIPIENT IS EXPRESSLY PROHIBITED FROM COPYING OR PUBLICATION OF THIS PRINT EXCEPT TO OTHERS IN THEIR ORGANIZATION ON A NEED-TO-KNOW BASIS.

B	03-AUG-2015	15-2103
REV	DATE	ECN #

THREAD: #6-32 UNC-2A	MOUNTING HOLE: .281 ^{+.003} / _{-.000}
MATERIAL: SEE TABLE	PANEL THICKNESS: .060 MIN.
CONDITION: SEE TABLE	MAX. PANEL HARDNESS: HRB 70
FINISH/COLOR: SEE TABLE	MIN. CENTERLINE-TO-EDGE: .28
FINISH SPEC.: SEE TABLE	
DESCRIPTION: SELF-CLINCHING PANEL FASTENER	

MODEL PATH: PFC2_CSTD /PFC2_CSTD /C19-02067	SCALE: 4x	DWG NO. YC3-9614	REV: B
---	-----------	------------------	--------